



LIFTING & PULLING MACHINES

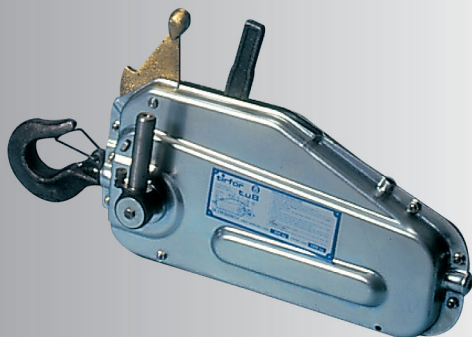

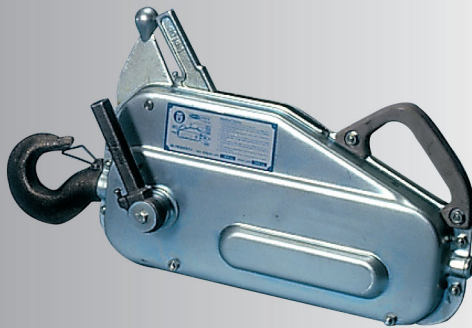


More than 30 years of manufacturing experience is behind the TU-TIRFOR range of lifting and pulling machines. Available in four sizes – 800kg to 4000kg – they offer portability, safety and precision. The unique rectilinear operation enables the machines to operate in any direction and for any height of lift or length of pull. Lifting and pulling power can also be increased with the use of sheave blocks.

- Tirfor hoists have two 'U' shaped jaw blocks which preserve the cylindrical form of the wire rope to ensure there is no deformation and very little wear of the rope.
- The TU system provides high mechanical efficiency which ensures ease of operation and longer service life.
- Accidental release is precluded and the self-gripping action of the jaws is maximised.

Tirfors are used in applications across industry, including civil engineering, construction, mining, pipe laying, shipbuilding, agriculture and forestry.

- **Universal** – It is a hoist, winch, tensioner, binder, ratchet – and much more.
- **Portable** – It has the lowest weight to capacity ratio of any hoist or winch with comparable capacities.
- **Unique** – Its unique wire rope gripping system provides unlimited pulling length or lifting height and pinpoint accuracy in positioning any work load.
- **Unmatched safety** – It is simply designed and ruggedly constructed with the finest alloy heat-treated steel. The load is automatically held securely, with a large overload margin of safety.
- **Indispensable** – for all construction and maintenance jobs. It is used daily by millions of people all over the world.

technical specifications	Nominal Lifting Capacity (Kg)	Maximum Traction Capacity (Kg)	Mass in Kg	Overall Dim. (mm)	Wire Rope Dia (mm)	Speed of Rope Movement Per Minute	Aggregate Wire Breaking Load (Kg)	Safety Factor
TU-8 	800	1 250	8.4	527 x 247 x 113	8.3	2 to 2.5 metres	5 200	5 to 1
TU-16 	1 600	2 500	18.5	660 x 330 x 145	11.5	2 to 3 metres	10 000	5 to 1
TU-40 	4 000	6 000	27.0	676 x 330 x 157	16.3	2,8 metres	19 100	4 to 1

Increase of Lifting and Pulling Power

TIRFOR machines, used in conjunction with sheave blocks, will efficiently solve most of your pulling and lifting problems.

By using sheave blocks on the hauling rope, the nominal capacity of TIRFOR machines can be multiplied two, three or even four times as shown in the diagram.

As a rule it is not difficult to figure the number of line parts to be used for a given load. It is, however, important – especially when there is no greater number of line parts – to take into account the friction in the sheaves, which can have a non-negligible influence on the strain exerted on the hoist and the top anchoring hook of the block.

