



Tiger



PERSONAL FALL PROTECTION BEAM ANCHORS

Tiger Beam Anchors are used as anchorage connectors for personal fall arrest systems & meet the requirements of SANS 50795 and EN 795

Designed to be attached to Horizontal I-Beams with an attached personal fall arrest system jaw sliding clamp can also be attached to vertical I-Beams.

(full body safety harness, shock absorbing lanyard or fall arrest block). The Tiger single Minimum breaking strength 22.3kN

Designed for one person use only with a maximum capacity of 140kg

Model Number

FABASJ

Single Jaw Sliding
Fixed Beam Anchor



Model Number

FABADJ


Two Jaw Sliding
Fixed Beam Anchor



Model Number

FABART

Mobile Two Jaw Sliding
Mobile Beam Anchor

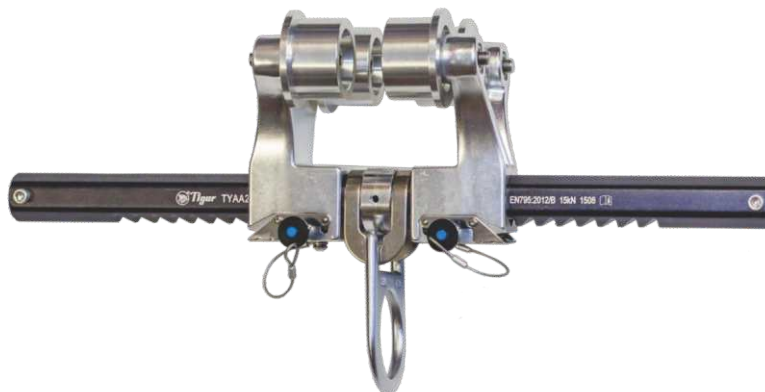

Technical Data

Product Code	Description	Beam Flange Size	Length (mm)	Height (mm)	Width (mm)	Weight (kg)
FABASJ45	Fixed Type Single-Jaw Sliding Horizontal & Vertical Beam Use	63.5 - 450mm	684	209	76	2.83
FABADJ45	Fixed Type Two-Jaw Sliding Horizontal Beam Use	63.5 - 450mm	643	199	76	2.22
FABART45	Mobile (rolling) Type Two-Jaw Sliding Horizontal Beam Use	63.5 - 450mm	643	239	140	3.28

Beam Anchors for larger beams available on request

HARU®

FALL ARRESTORS

A range of retractable lifelines that reduces the shock loading on the body by limiting the distance of fall. Used in work inspection, general construction, maintenance, oil production, telecommunications, mining and confined work areas.

HARU® Fall Arrestors provide continuous protection against falls. The Fall Arrestor automatically extends and retracts to allow freedom of movement. Each unit includes anchorage ropes.

HARU® Fall Arrestors are manufactured in a ISO 9001:2008 factory and all products are CE approved.



FAHB03,5N



Patented Safety Mechanism



FAHB06N



FAHB10

FAHB06



FAHB15



FAHB20

SPECIFICATIONS - FALL ARRESTORS - EN360 APPROVED

Model Number	Type	Length (m)	Weight (kg)
FAHB03.5N	Nylon Webbing	3.5	1.6
FAHB06N	Nylon Webbing	6	1.6
FAHB06	Steel wire rope	6	4.5
FAHB10	Steel wire rope	10	4.8
FAHB15	Steel wire rope	15	6.6
FAHB20	Steel wire rope	20	8.6


CAUTION!



Always read the instruction manual before use. Always wear the correct safety gear.

TRIPOD

FATPC

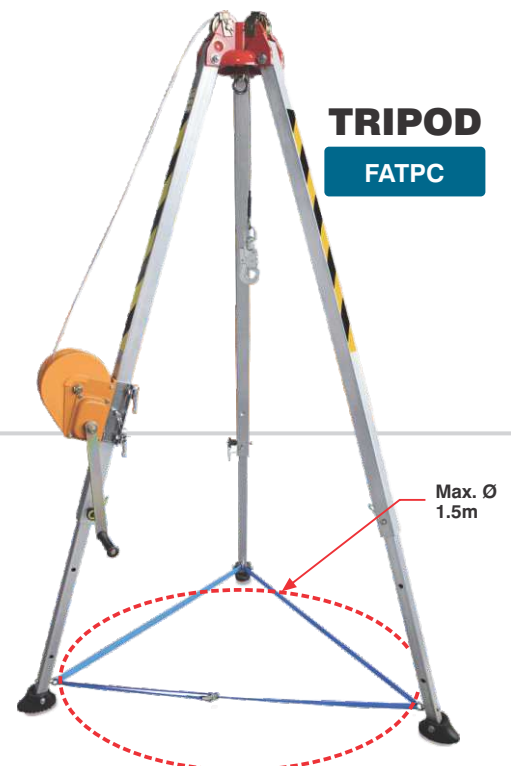

Max. Ø 1.5m

SPECIFICATIONS - TRIPOD - EN795 APPROVED

Model Number	Material	Height (M)	Wire Dia. x Length	Safe Load (kg)	Weight (kg)
FATPC	Aluminium	1.35 - 2.40	5mm x up to max. 30m	100	20.0 (Excl. Rope)

For confined space and rescue applications. Adjustable height. Additional cable pulley and point to attach to retractable lifeline. For manhole max. diameter 1.5m and under.