


Air Hammers

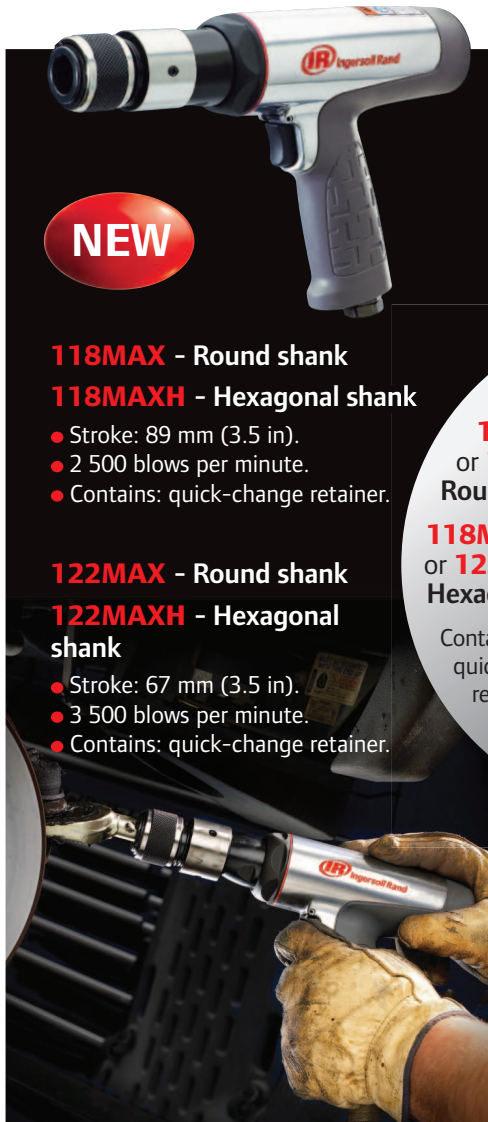

NEW

118MAX - Round shank
118MAXH - Hexagonal shank

- Stroke: 89 mm (3.5 in).
- 2 500 blows per minute.
- Contains: quick-change retainer.

122MAX - Round shank
122MAXH - Hexagonal shank

- Stroke: 67 mm (3.5 in).
- 3 500 blows per minute.
- Contains: quick-change retainer.

118MAXK
 or **122MAXK**
 Round shank

118MAXHK
 or **122MAXHK**
 Hexagonal shank

Contains: hammer, quick change retainer and 5 chisels.

122MAXK



121/Q-EU - Round shank
121/QH-EU - Hexagonal shank

- Stroke: 58 mm (2.3 in).
- 3 000 blows per minute.



116-EU - Round shank
116H-EU - Hexagonal shank

- Stroke: 67 mm (2.6 in).
- 3 500 blows per minute.
- Power regulator.

LA426-EU - Round shank
LA427-EU - Hexagonal shank

- Stroke: 67 mm (2.6 in).
- 3 500 blows per minute.
- Power regulator.
- Contains: 116-EU or 116H-EU and 6 chisels.



LA426-EU



125-EU

- Stroke: 28 mm (1.1 in)
- 4 600 blows per minute.
- Contains: steel needles.

Accessories: sets of 19 needles

	CPN	Material	Length
NS11-122-19	03676368	Steel	178 mm
NS11-22-19	03676335	Steel	127 mm
NS11-S22-19	03676343	Stainless steel	127 mm
NS11-B22-19	03676350	Beryllium copper	127 mm

Hammer Accessories

- 115-183 (CPN: 03788510): spring retainer for 116-EU, 116H-EU, LA426-EU and LA427-EU.
- AVC10-183 (CPN: 03010980): spring retainer for 121/Q-EU and 121/QH-EU.
- 9512 (CPN: 45563749): quick-change retainer for all models
- 9500 (CPN: 80117427): chisels, round shank (5 pieces).
- 116H-K5 (CPN: 92536093): chisels, hexagonal shank (5 pieces).



9500

Specifications at 6.2 bar (90 psi)

	CPN	1 min.	mm	mm	kg	mm	NPTF	mm	L/s	L/s	dB(A)	m/s ² / K ⁽¹⁾
Air Hammers - Round shank												
121/Q-EU	01343698	3 000	10.2	58	1.59	194	1/4"	10	1.4	7.1	95.3	19.9 / 4.6
122MAX	47124482	3 500	10.2	67	1.80	218	1/4"	10	1.4	5.5	94.2	5.5 / 1.8
118MAX	47124490	2 500	10.2	89	2.10	314	1/4"	10	1.4	5.5	92.6	4.0 / 1.4
116-EU	01343755	3 500	10.2	67	1.54	198	1/4"	10	1.4	7.1	101.4	14.8 / 2.2
Air Hammers - Hexagonal shank												
121/QH-EU	01344944	3 000	10.2	58	1.59	194	1/4"	10	1.4	7.1	95.3	19.9 / 4.6
122MAXH	46816740	3 500	10.2	67	1.80	218	1/4"	10	1.4	5.5	94.2	5.5 / 1.8
118MAXH	46816732	2 500	10.2	89	2.10	314	1/4"	10	1.4	5.5	92.6	4.0 / 1.4
116H-EU	01343904	3 500	10.2	67	1.54	198	1/4"	10	1.4	7.1	101.4	14.8 / 2.2
Air Needle Scaler												
125-EU	01352178	4 600	-	28.6	2.83	465	1/4"	8	3.8	7.1	96.6	8.3 / 1.3

(1) ISO28927 - 3-axis measurement: vibration level / measurement uncertainty.