



VITALIFT®



DUPLEX FLAT WEBBING AND ENDLESS ROUND SLINGS

Manufactured to EN1492 and SANS94


- Slings colour coded to WLL for easy identification
- All slings are manufactured to comply with:
EN1491-1 and SANS94-1 Flat woven webbing slings
EN1491-2 and SANS94-2 Roundslings
- Safety factor 7:1 in compliance with standards and the Occupational Health and Safety Act
- Each sling serial numbered for traceability
- Common sizes available ex-stock, larger capacity slings can be manufactured to order




WORKING LOAD LIMITS & COLOUR CODES

Colour Coding t	Straight / Vertical Lift t	Choked Lift t	Basket Hitch		
			Parallel t	0° to 90° between legs t	90° to 120° between legs t
Violet	1.0	0.8	2.0	1.4	1.0
Green	2.0	1.6	4.0	2.8	2.0
Yellow	3.0	2.4	6.0	4.2	3.0
Grey	4.0	3.2	8.0	5.6	4.0
Red	5.0	4.0	10.0	7.0	5.0
Brown	6.0	4.8	12.0	8.4	6.0
Blue	8.0	6.4	16.0	11.2	8.0
Orange	10.0	8.0	20.0	14.0	10.0
Factor	1.0	0.8	2.0	1.4	1.0


Slings with higher working load limits available on request

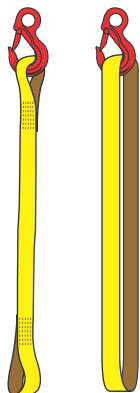

VERTICAL SLING

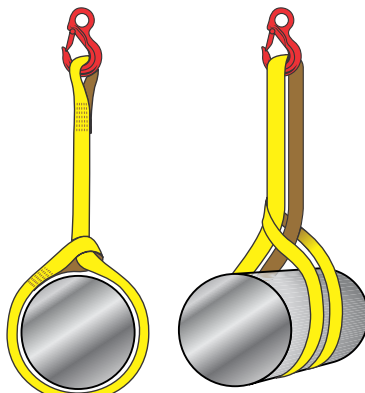

CHOKER SLING

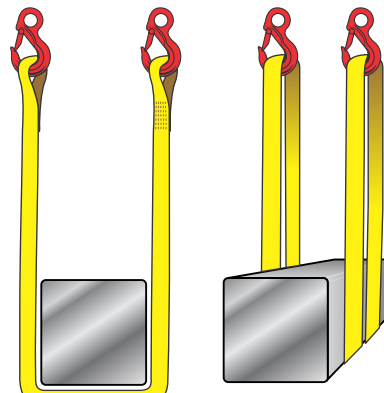

PARALLEL BASKET SLING

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your sales representative when ordering.